


Fire Rated LED Recessed Downlight

Installation Instructions

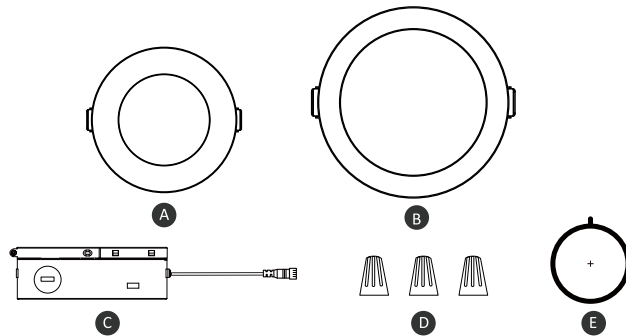

PACKAGE CONTENTS

PART	DESCRIPTION	QUANTITY	PART	DESCRIPTION	QUANTITY
A	4INCH Fire Rated LED Recessed Downlight A-FRDL4-12W-5CCT	1	B	6INCH Fire Rated LED Recessed Downlight A-FRDL6-12W-5CCT	1
C	J-Box driver	1	C	J-Box driver	1
D	Wire nut	3	D	Wire nut	3
E	Hole cutout card	1	E	Hole cutout card	1

DIMMER RECOMMENDATION

This unit may operate on other dimmers we haven't tested with. (Input 120V 60Hz)

LEVITON	6672, RNL06, IPL06, DSL06, 6674
LUTRON	TG-600PR-WH, S-600PR-WH, CTCL-153PDH-WH, TGCL-153PH-LA, SLV-600P-AL, DV-600PR-WH, SCL-153PH-WH, DVCL-153P, MSCL-OP153M, PD-6WCL, MACL-153M//MA-R

2-HOUR FIRE RATING | RÉSISTANCE AU FEU 2 HEURES

- The series has been tested to comply with: UL 263, ASTM E119 & CAN ULC S101
- The series has been tested and approved for 2-Hour Fire Rating with the following fire rated assemblies: UL L505, L511, L536, L538, L541, L556, L577, M500, M510, M521 & M543.

IMPORTANT

READ ALL INSTRUCTIONS BEFORE INSTALLING FIXTURES. RETAIN FOR FUTURE REFERENCE.

SAFETY

For your safety, this fixture must be wired in accordance to local electrical codes and ordinances. All work should be done by a qualified electrician.

ASSEMBLY INSTRUCTIONS

1. Preparing for installation: disconnect electrical power before installing or servicing any part of this fixture.
2. Locate a suitable position to plate the fixture and open in accordance to the cut-hole dimensions (refer to hole cut table for appropriate size).
3. Run electrical wire from the switch (power supply) through the mounting hole-use nmd90 romex or bx cable.

WARNING

- Make certain power is off from the electrical panel before starting installation or attempting any maintenance. Indoor installation only.
- Do not modify this fixture. Any modifications may render the product unsafe and void warranty.
- Suitable for Wet Locations.
- To prevent electrical shock, please wear rubber shoes and work gloves when installing the fixture.


INSTALLATION STEPS

- 1.** Turn off the power before installation. Remove the existing fixture if applicable. Cut the ceiling hole according to the provided opening dimensions, see Fig1.

HOLE SIZE


4inch: 4 21/64" (110mm)

6inch: 6 19/64" (160mm)



- 2.** Open the J-Box cover and remove the appropriate knockout(s) on the side panel. Install the appropriate cable clamp(s) (not included) and insert the electrical supply cable through the cable clamp. Connect the supply wires to the fixture wires by using 3 wire nuts. Attach white to white, black to black, copper to the ground wire, see Fig2.


Black — L
White — N
Copper — G




- 3.** Insert J-Box through the mounting hole and secure it, connect the fixture power cable to the J-Box. Select lamp color desired with the CCT switch, see Fig3.

5 IN 1

- ☑ 2700K
- ☑ 3000K
- ☑ 3500K
- ☑ 4000K
- ☑ 5000K

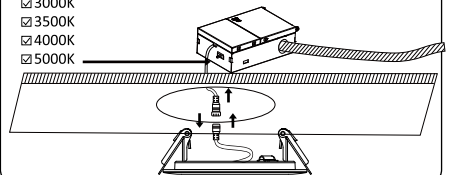

- 4.** Push the spring-loaded clips into the mounting hole upwards and insert the fixture into it. Release the clips and the fixture will be pulled flush to the ceiling, see Fig4.

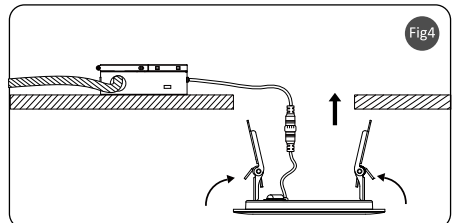

- 5.** Turn on the power after installation, check the fixture can work well, see Fig5.

