

Parameters

SKU	Input Voltage	Frequency	Power	Input Current	CCT
AN-BL30W-NV-YKP-BZ	AC120-277V	50/60Hz	30W	0.275A	4000K, 5000K
AN-BL40W-NV-YKP-BZ			40W	0.367A	
AN-BL60W-NV-YKP-BZ			60W	0.55A	
AN-BL70W-NV-YKP-BZ			70W	0.64A	

Remark: "Y" represents CCT, could be 4 or 5 and indicates 4000K or 5000K,
"P" indicates fixture with photocell.

Cautions:

- 1 Can not use the electric generator to test the LED lamp.
- 2 Please abide by related country, regional and local law and regulations when install this fixture.
- 3 To avoid electrical shock and damage, please do not install the lights in raining days.


Notices:

- 1 To prevent from electric shock or fire risk, the installation must be conducted by operator who have professional electrical knowledge.
- 2 Please wear gloves to avoid injury before installing lamps.
- 3 During or after installation, if there are situations such as smoke, fire in the wires or lamps, please turn off the power immediately and notify relevant personnel of an overhaul.
4. This light can be used for outdoor installation.


Instructions:

Choose the wire connection ways, dimming ways and installation ways according to your needs and the led fixture purchased.

Product Dimension

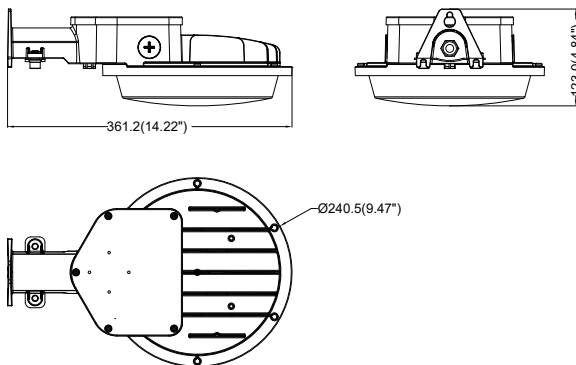


Wiring Diagram

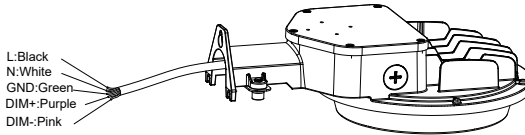


Wall Mounting Installation


1. Use hex key to loosen two screws, take down install accessory as shown.



2. Base on as shown screws size, use drill to open three holes, drill in expansion bolt. Wiring connection.




3. Lock in fixture with three screws tightly. Finished installation.




Photocell Installation

1. Take out fixture from box, rotate and take away shorting cap.




2. Twist in photocell. Finished installation.




CCT selectable manual (If Applicable)

1. Take off the cap on the side of fixture




2. Turn on switch. From top to bottom CCT: 3500K, 4000K, 5000K. Then twist in cap tightly.



CCT&Watt selectable manual (If Applicable)

1. Take off the cap on the side of fixture.



2. Turn on switch. The left side, from top to bottom CCT: 3500K, 4000K, 5000K. The right side, from top to bottom watt: 40W, 55W, 70W. Then twist in cap tightly.

