

## **In Situ Temperature Measurement Test Report**

For

**Antec Lighting Inc**

(Brand Name:  **AOK**)  
Quality, Honesty, Service and Innovation

Uniy C, 3979 E Guasti Road, Ontario, CA 91761

### **Parking Garage Luminaires**

Model name(s): AOK-40WiDA-NV-L3-XX-XX80-150-P

Remark: The first “XX” can be “00” for without sensor or “SN” for with sensorfunction, The last “XX” represents different CCT as below:  
30=3000K, 35=3500K, 40=4000K, 50=5000K, 57=5700K.

Representative (Tested) Model: AOK-40WiDA-NV-L3-00-3080-150-P

Model Difference: All construction and rating are the same, except CCT and sensor.

Test & Report By:

*Don Tang*

Engineer: Don Tang

Date: Oct17,2018

Review By:

*John Li*

Manager: John Li

Note: 1. The results contained in this report pertain only to the rested samples.

2. This report does not imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Laboratory: Standard-Tech Co. Ltd Testing Center**  
**NVLAP CODE: 201011-0**

Report Format Number STD/QR4918-A/0

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320

Fax: 8620-32290422


<http://www.standard-tech.com>

## Table of Contents


1 General	3
1.1 Product Information	3
1.2 Standards or methods	4
1.3 Equipment list	4
2 Test conducted and method	4
2.1 Ambient Condition	4
2.2 Temperature Stabilization	4
2.3 Thermocouples	5
2.4 Thermocouples contact	5
3 Test Results	6
3.1 Test Data:	6
3.2 Test Photo:	6

# 1 General

## 1.1 Product Information

Brand Name	
Model Number	AOK-40WiDA-NV-L3-XX-XX80-150-P
Luminaire Type	Parking Garage Luminaires
Nominal Power	40W
Rated Initial Lamp Lumen	--
Declared CCT	3000K, 3500K, 4000K, 5000K, 5700K.
LED Manufacturer	Osram Opto Semiconductors(Malaysia) Sdn. Bhd.
LED Model	3000K: GW JTLRS1.EM-K2K5-XX57-1
Sample Receipt Date	Oct.15,2018
Sample Number	JAE180410-U1(3000K)

**Photo**

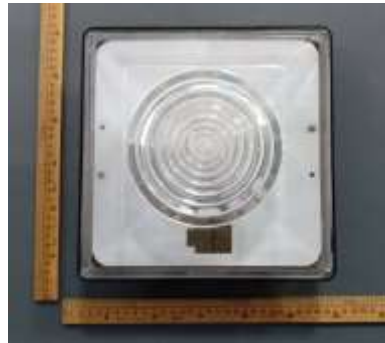

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4918-A/0

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

## 1.2 Standards or methods

The following standards are partly or totally used or referenced for test:

No.	Name
ANSI/UL 1598:2008	Luminaires

## 1.3 Equipment list

Equipment ID	Equipment Name	Last Calibration Date	Next Calibration Date
ST-R-049	Power Meter	2018-07-07	2019-07-06
ST-R-401	Temperature Tester	2018-01-29	2019-01-28

## 2 Test conducted and method

### 2.1 Ambient Condition

Test was conducted in an ambient temperature of  $25 \pm 5^\circ\text{C}$ . Ambient temperature variations above or below  $25^\circ\text{C}$  was subtracted from or added to temperatures recorded at points on the luminaire.

The ambient temperature was measured by a thermocouple which was immersed in 15ml of mineral oil in a glass container.

### 2.2 Temperature Stabilization

Temperatures were measured after they have stabilized when the test has been running for a minimum of 7.5 hours, or the test has been running for a minimum of 3 hours and three successive reading taken at 15 minutes intervals are with  $1^\circ\text{C}$  of another and are not rising.

## 2.3 Thermocouples

Type J thermocouple was used for temperature measurement. The thermocouple was 0.05mm<sup>2</sup>(30AWG), and complied with the requirements specified in ASTM MNL 12 and limits of error specified in NIST ITS 90 and ISA MC96.1.

## 2.4 Thermocouples contact

Thermocouples were in contact with the TMP LED location described in LM-80 test report. In order to gain the maximum temperature, if appropriate, more than one thermocouple were contact in these locations. For details information, please refer to clause 3.3 for the photo of thermocouple contact.

### 3 Test Results


Test date	2018-10-16	Test Ambient	25.2 °C
Sample No.		LED Package Model	
JAE180410-U1		DURIS E 2835 GW JTLRS1 .EM	
LED driver of Each Lamp	Output voltage V	Measured LED working current (Max.) mA	
1	34.5	44.3	

#### 3.1 Test Data:



Input Vol.	120.0V	Input Current	0.3124A	Input Wattage	37.22W	Temperature stabilization time:	500 min	
No.	Temperature (°C)		No.	Temperature (°C)		No.	Temperature (°C)	
	Measured	Corrected at 25°C		Measured	Corrected at 25°C		Measured	Corrected at 25°C
1	69.4	69.4	3	70.3	70.1	5	69.6	69.4
2	70.1	69.9	4	69.7	69.5	6	70.0	69.8
The highest in-situ measured temperature LED is 70.1°C								

#### 3.2 Test Photo:

Ts Position:

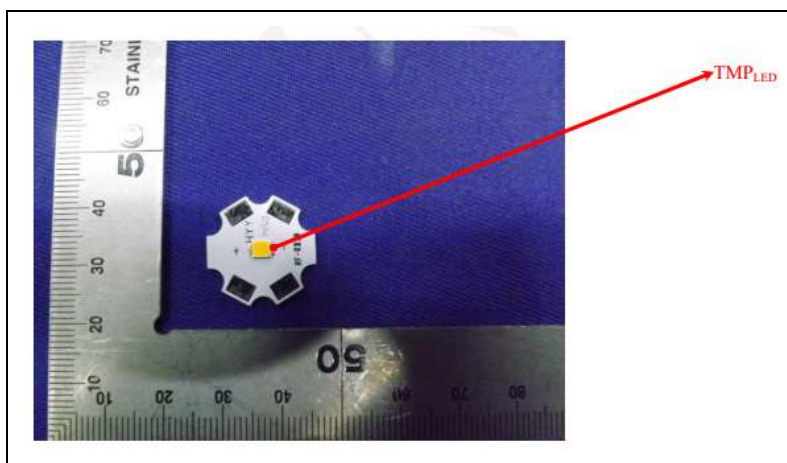

Thermocouple Location on Temperature Measurement Point (TMP):

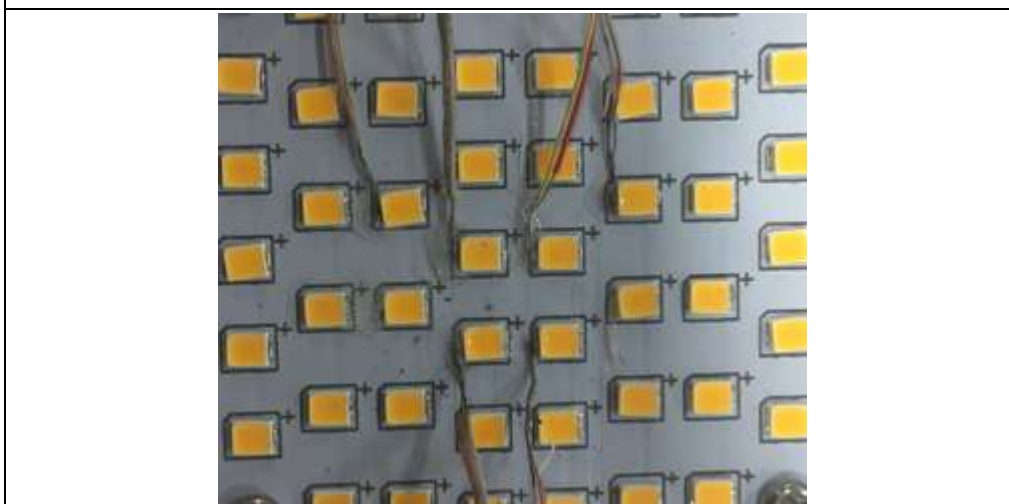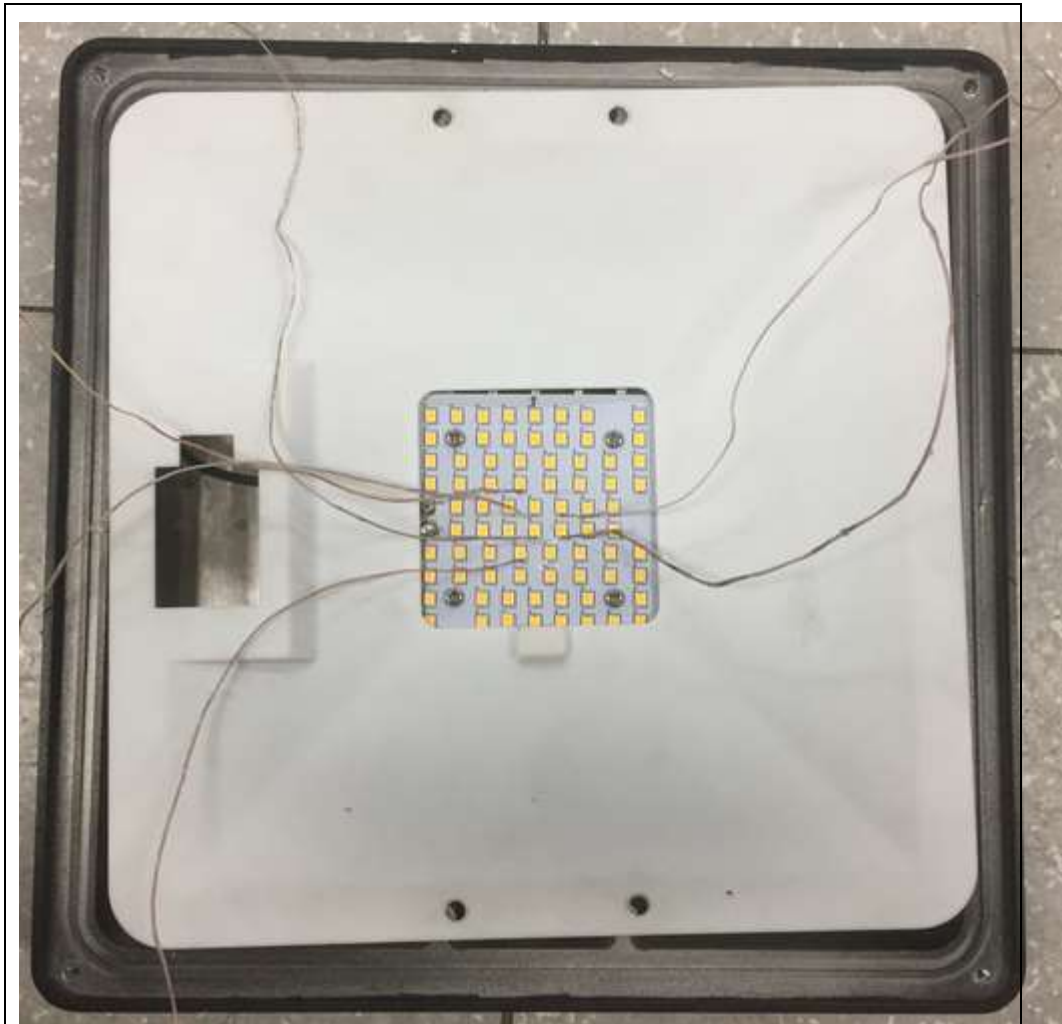


**Laboratory: Standard-Tech Co. Ltd Testing Center**  
**NVLAP CODE: 201011-0**

Report Format Number STD/QR4918-A/0

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

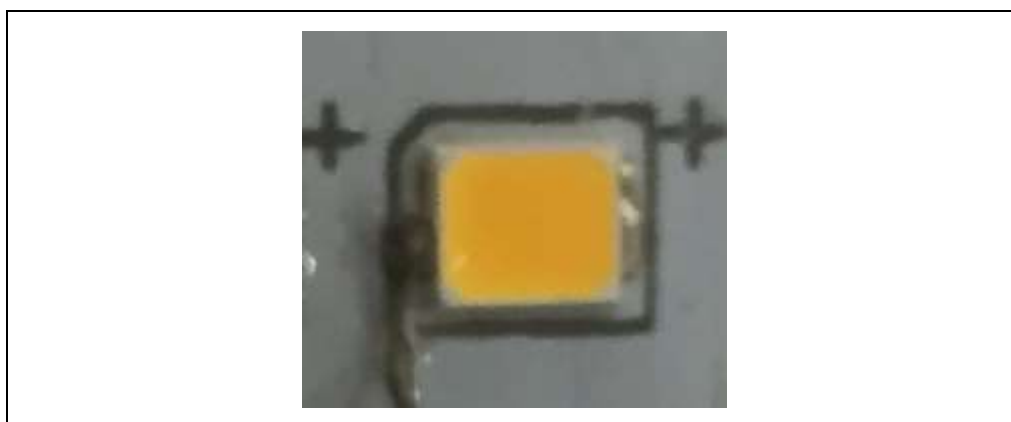

Time (t) at which to estimate lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	80.47%
Reported L70 (hours):	>60000

\*\*\*\*\* END OF THE TEST REPORT\*\*\*\*\*