

PLEASE READ INSTRUCTIONS CAREFULLY BEFORE INSTALLATION OR PERFORMING MAINTENANCE KEEP THIS FOR FUTURE REFERENCE

Part No.	Input Voltage	Frequency	Power	CCT	Rated Current(max)
AN-FWP02-30W-345K	AC 100-277V	50/60Hz	15W/20W/30W	3000K/ 4000K/ 5000K	0.3A
AN-FWP02-60W-345K			40W/50W/60W		0.6A
AN-FWP02-90W-345K			70W/80W/90W		0.9A

IMPORTANT SAFETY INFORMATION:

- Working Temperature: -25°C~40°C
- This fitting must be wired in accordance with the National Electrical Code & applicable local codes & ordinances.
- Installation and servicing this fitting should be performed by qualified electrician only.
- Before installation or maintenance, turn off electric power and allow the fitting to be cool.
- Proper grounding is required to insure personal safety. Carefully observe grounding procedure under installation section.
- Ensure all electrical connections are secure & that there are no loose strands.
- Install the fitting in a well-ventilated environment, keep away from corrosive/explosive materials, flammable gas or electric dust.
- Violent shaking or impact should be avoided when the fitting is working.
- To weather proof your outdoor installation, be sure to seal all holes, conduit plugs with silicone caulking.

SUGGESTED METHOD OF INSTALLATION:

ALWAYS SWITCH OFF THE MAINS SUPPLY BEFORE INSTALLATION.


Step 1: Open the upper cover by unscrewing two screws that are located on the upper cover of the light, remove junction box (Fig.1)

Step 2: Drill required holes on junction box for installation, and stick the EVA adhesive gasket to the back of junction box (Fig.2)

Step 3: Thread the power wires into junction box through the protective rubber gasket, then fix junction box on the wall (Fig.3)

Step 4: Install upper cover to the junction box, adjust CCT and wattage according to actual demand, then connect wires by knob terminals (Fig.4)

Step 5: Cover it and fix the screws(Fig.5)

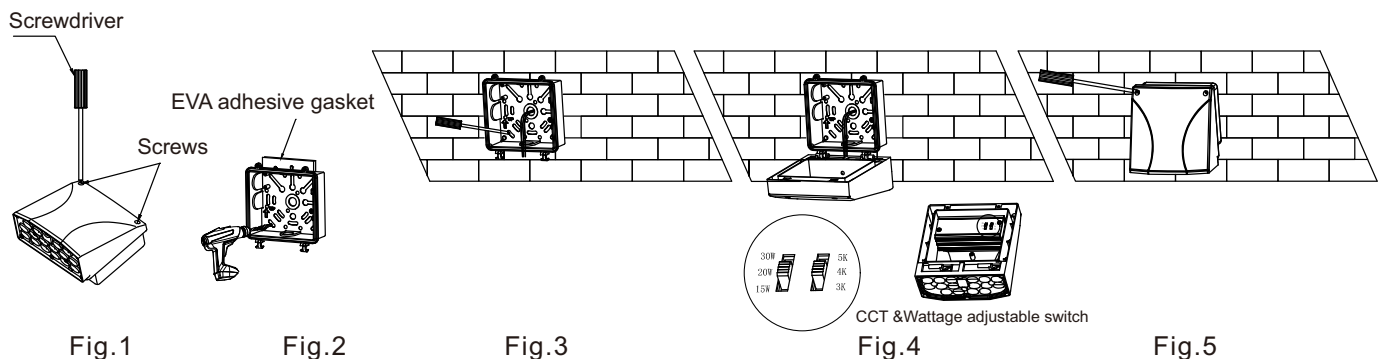

WIRING INSTRUCTION OF MAIN CABLE:


black(or brown)---connect Live wire
white(or blue)---connect Neutral wire
green (or yellow-green)---connect Earth wire

WARNING:

The product must be grounded and installed in accordance with the National Electrical Code and all local codes. Failure to do so may increase the RIS K OF PERSONAL INJURY, PROPERTY DAMAGE, FIRE AND DEATH.